

Indoor Commercial

CROMPTON

- INR > 1000 cr. Lighting Business
- More than 80 years of lighting Industry Experience
- Total Employee >3500 (approx.)
- Own NABL accredited Photometry LAB
- 22 Branches across country
- More than 350 sites installed with LED products
- 550 service centers across country

Crompton Lighting

Crompton lighting has been a pioneering player in the field of artificial illumination since last three decades. Some of the application areas are –

- **Indoor Commercial:** *Modern Offices, Hospitals, Pharmaceutical Industry*
- **Industrial Application:** *Shop Floors, Process Areas Ware Houses, Security including applications in hazardous environments*
- **Infrastructure:** *Metro Stations, Railway Marshalling Yards, Ports and Apron Lighting in Airports*
- **Street Lighting:** *City and Service Roads, National and State Highways, City Beautification -Parks and Façade Lighting of Heritage Buildings and Monuments.*

2x2,36W(Standard)

- Recessed mounted backlit LED Luminaire
- Powered by Dual driver for more stability
- Efficacy : LPW 114 lm/w
- Surge Protection : 4KV
- Power Factor :.97pf
- Life: L70,50000 hrs



Stellux -I




Stellux -P




Stellux -S




Stellux -H

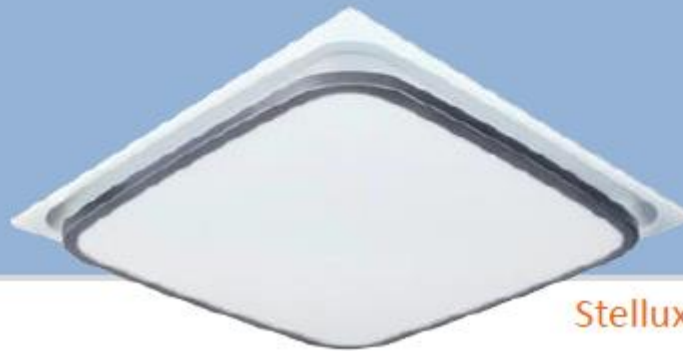


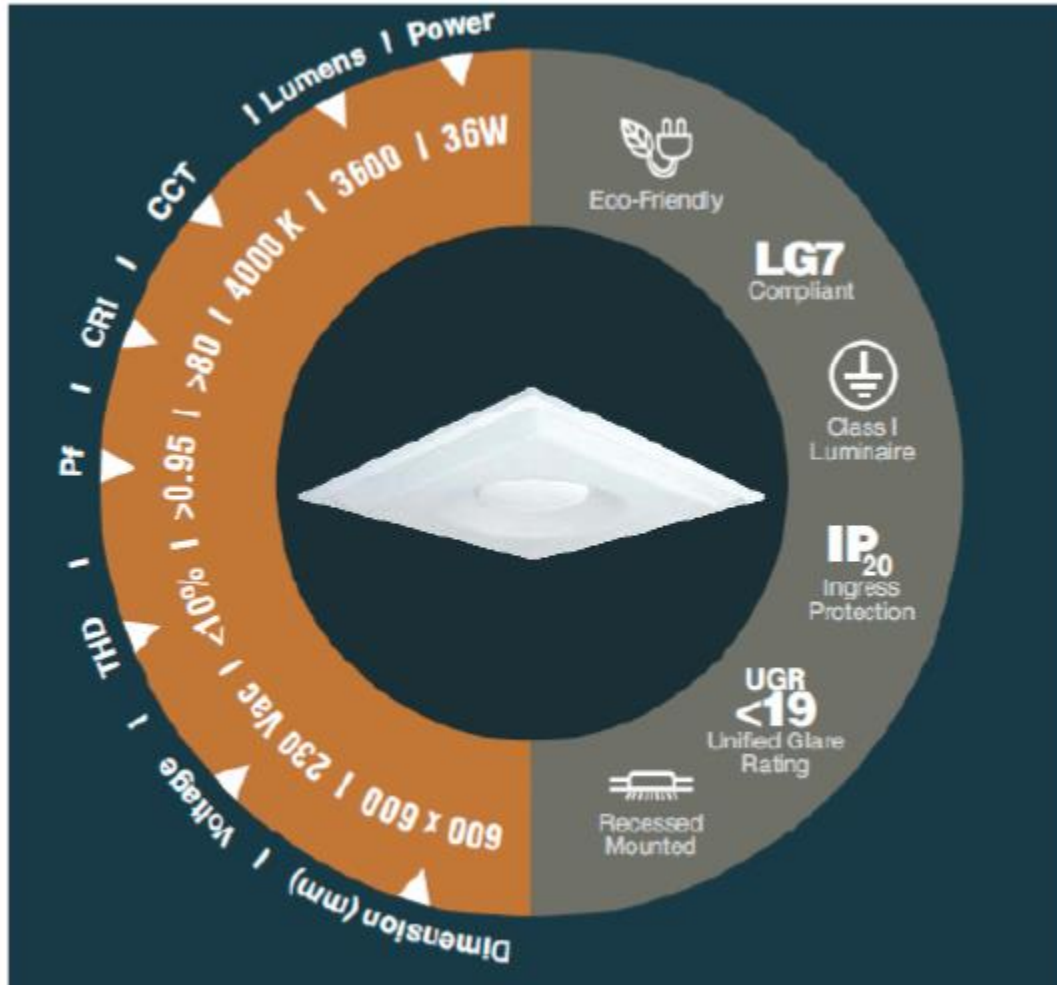

Unique Features


1. LG7 Compliant
2. UGR<19
3. Superior Electronics
 - a) THD<10%
 - b) P.F >0.95
4. Efficacy > 100lm/W

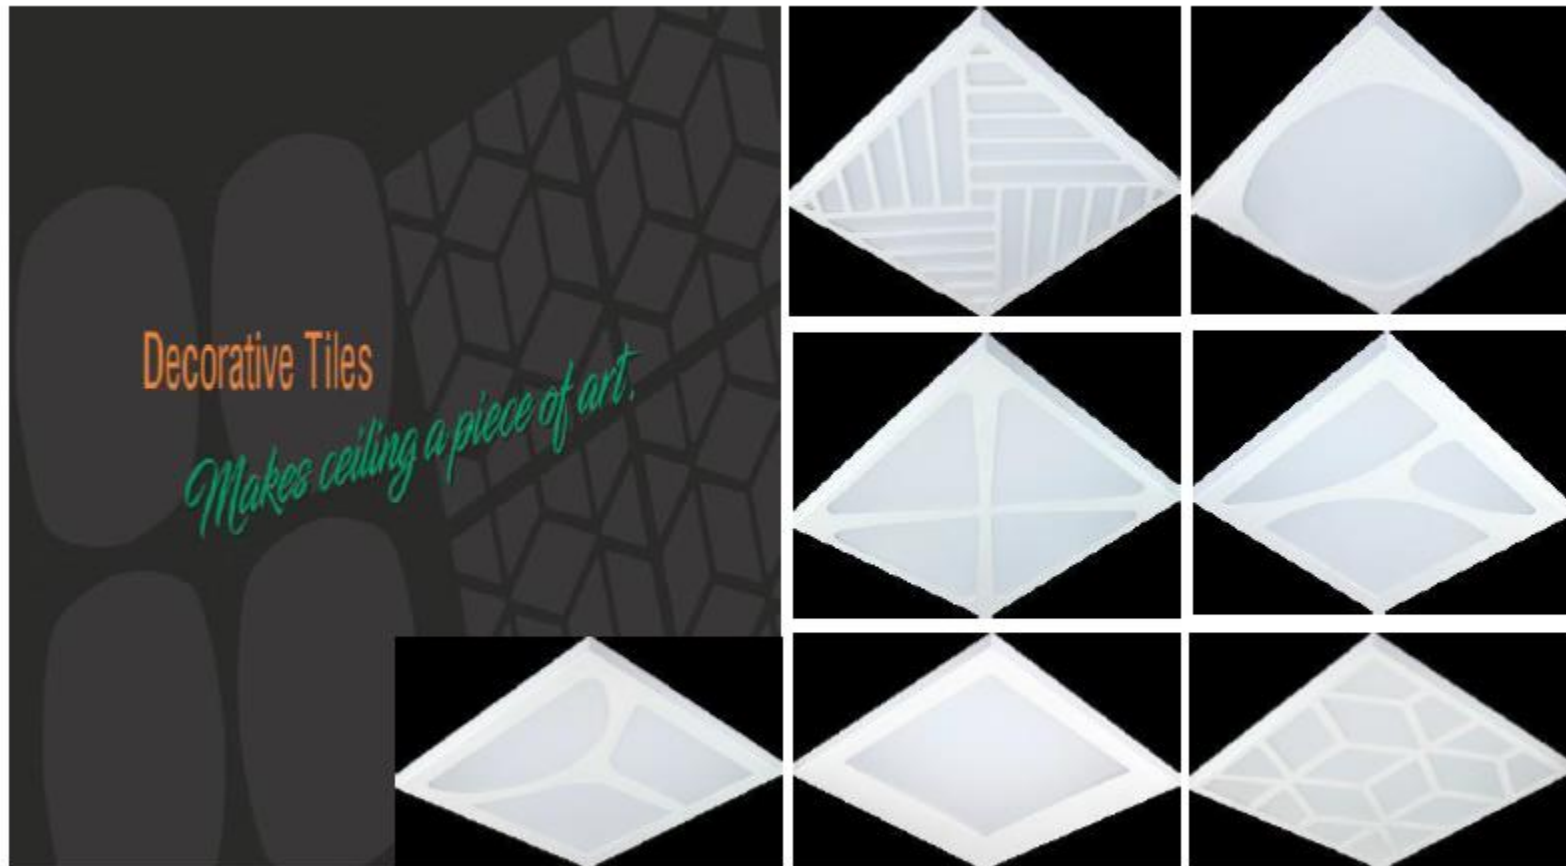

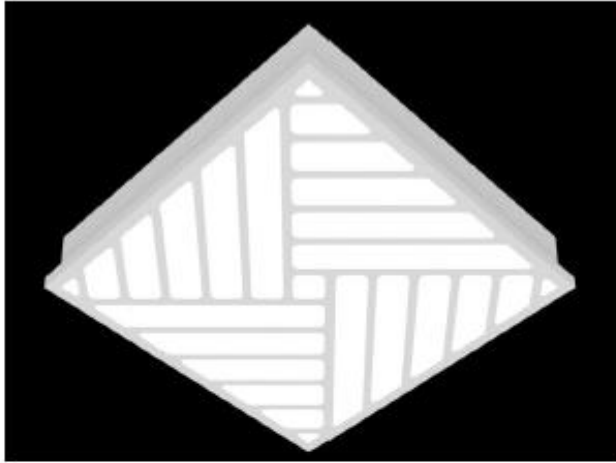

Features

- Patterns on the ceiling for commercial spaces
- Slim Trim >> Seamless Integration with Ceilings
- External Driver >> Easy Maintenance
- Sequencing – Makes ceiling a piece of art.
- CCT – 5700 K, 4000 K
- System Efficacy - > 90 lm/w
- Dimensions: 595x595x75 mm

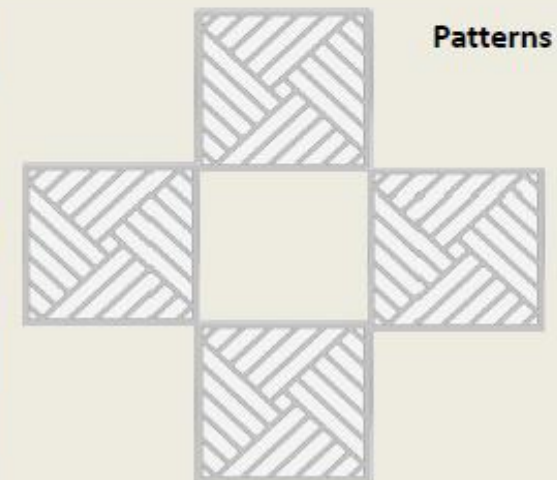

Downlighter

- Recess type round shape backlit LED slim downlighter
- Efficacy :LPW 105lm/w
- Dia.172mm,height 32mm
- Power factor :.99pf
- Life: L70,50000hrs



Spotlight

- Recessed mounted circular COB Led spotlight.
- Power 3W to 50W
- Efficacy : 100 LPW
- Beam Angle 36 degree



Cylindrical Downlighter

- surface /suspended mounted COB based cylindrical downlighter
- Efficacy :132 lm/w
- Power factor :.98pf
- Life: L70,50000hrs.
- Sizes: (L 147mm,dia.100mm and L 177mm,dia.120mm)



Downlighter

- Recessed square LED downlighter comprises of Aluminum die cast housing
- Power 12W,15W,18w
- Efficacy : 110lm/w
- All powers are available in same housing size: LXW 155mm,height 45mm



Downlighter

- Recessed round LED downlighter comprises of Aluminum die cast housing
- Power 12W,15W,18w
- Efficacy : 100lm/w
- All powers are available in same housing size: dia.160mm,height 45mm




Downlighter

- Recessed square LED downlighter comprises of Plastic module housing
- Power 12W,15W,18w
- Efficacy : 104lm/w
- All powers are available in same housing size: LXW 160mm,height 56mm



Linear Channel

- Suspended downlight
linear luminaire
downlight
- Efficacy : 102lm/w
- Width X Height :
54mmX74mm
- Diffuser : PMMA
- Screw less end-cap

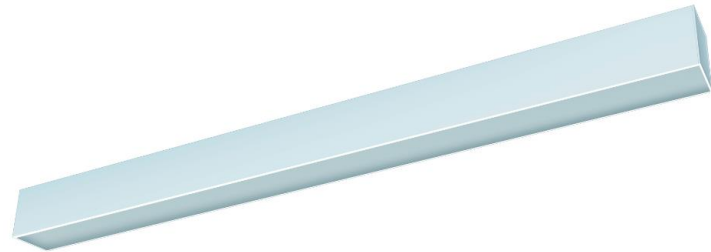

Linear Channel (formation)

- Suspended/surface Linear Channel
- Capable for innovative design formation
- Efficacy :100LPW
- Life: L70 ,50000 hrs.
- Power: As per design required .
- Different shapes: T,Y,L,+
- Width 52mm,Height 75mm



Linear Channel Recessed

- Recessed downlight linear luminaire downlight
- Efficacy : 100lm/w
- Width X Height : 66mmX74mm
- Diffuser : PMMA




Lunar

- Suspended/Surface Luminaire
- 3 Different Dia.:
300mm,450mm,600mm
- Power : 25W,36W,40W




EPSILON

- hexagonal Epsilon is meticulously welded to resemble uniform lighting
- Power:36W

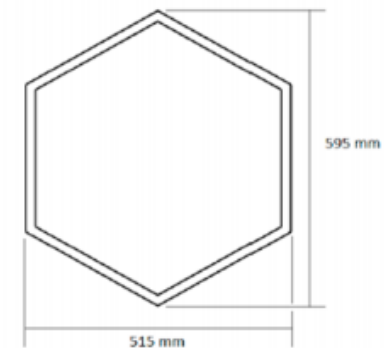

CAPELLA

- Capella: Suspended mounted LED Luminaire
- Power 36W

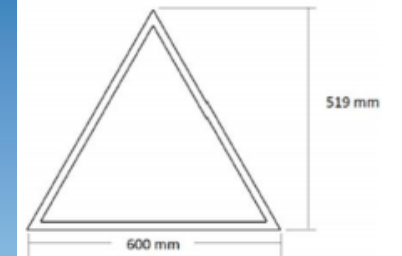

Our Customer Base

We have served leading Indian and international brands. Here are some of the brands who we have worked with (specifically in Commercial segment) –



SKODA



